


Motor Oil SF SAE 40

Monograde oil for Gasoline and Diesel engines.

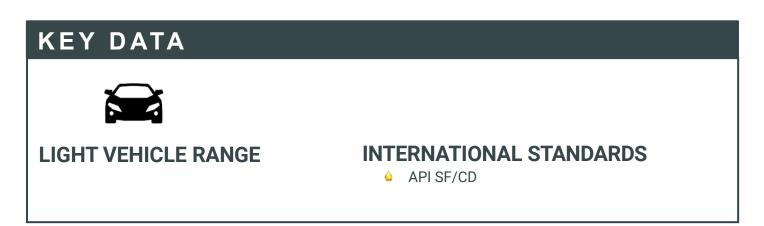

APPLICATIONS

Lubricant developed for Gasoline and Diesel engines.

Every condition of use (street, road, highways).

Designed for particular cars and/or utility vehicles where manufacturers recommend lubricants conforming to API SF/CD.

CUSTOMERS BENEFITS

- Adapted levels of detergency and dispersancy.
- Good Viscosity Index ensures Engine protection.
- Modern additive technology. Good anti-wear, anticorrosion, antirust and anti-oxidation properties.

CHARACTERISTICS²

TEST	UNIT	RESULT
Viscosity grade	-	SAE 40
Kinematic viscosity at 40°C	mm²/s	130
Kinematic viscosity at 100°C	mm²/s	13.5
Density at 15°C	kg/m ³	898
Viscosity index	-	98
Pour point	°C	-12
OC Flash point	°C	242

² The characteristics given above are obtained with a standard tolerance threshold during production and may not be considered specifications.

RECOMMENDATIONS FOR USE

Before using the product, the vehicle's maintenance guide should be checked. Oil changes should be carried out in accordance with the manufacturer's recommendations.

The product should not be stored at temperatures over 60°C. It should be kept away from sunlight, intense cold and extreme temperature fluctuations. If possible, the packaging should not be exposed to the elements. Otherwise, the drums should be laid horizontally in order to avoid any contamination from water and to prevent the product's label from rubbing off.

HEALTH, SAFETY AND THE ENVIRONMENT

Based on the toxicological information available, this product should not cause any adverse health effects, provided it is used for its intended purpose and in accordance with the recommendations laid out in the Safety Data Sheet (SDS).

This can be obtained on request from your local reseller and is available for consultation at <u>https://ms-sds.totalenergies.com</u>.

This product should not be used for any purposes other than the ones for which it is intended.



TotalEnergies Lubrifiants / Last update of this datasheet: June 22 /

Some variations can be expected under normal production conditions, but these should not affect the product's expected performance irrespective of the site. The information contained in this document is subject to change without notice. Our products can be viewed on our website at <u>www.lubricants.totalenergies.com</u>.